



SCHATTELLO round		∅ 4.0 m	∅ 5.0 m	∅ 6.0 m	∅ 6.0 m	∅ 7.0 m	
Segments		8	8	8	12	12	
Area	m <sup>2</sup>	12	19	27	28	38	
<b>A</b>	Height closed incl. top plate	cm	410	425	440	450	465
<b>B</b>	Height opened incl. top plate	cm	303	318	333	343	358
<b>C</b>	Headroom with valance	cm	205	205	200	205	205
<b>D</b>	Headroom without valance	cm	227	227	222	237	237
<b>E</b>	Height of valance	cm	28	28	28	28	28
<b>F</b>	Ground clearance from pole edge	cm	193	158	123	132	85
<b>G</b>	Height of lower disc flange	cm	183	198	213	223	238
Weight without packaging	kg	27	38	45	52	58	
Support pole diameter	mm	outer ∅ 76 ( pole thickness 3 )					
Packaging: cardboard sleeve		17 kg, ∅ 33 cm, length 444 cm		18 kg, ∅ 35 cm, length 444 cm			




SCHATTELLO rectangular		2.5 x 3.5 m	2.5 x 4.0 m	2.5 x 5.0 m	3.0 x 4.0 m	3.0 x 5.0 m	
Segments		8	8	8	8	8	
Area	m <sup>2</sup>	8,8	10	12,5	12	15	
<b>A</b>	Height closed incl. top plate	cm	402	391		402	402
<b>B</b>	Height opened incl. top plate	cm	295	297		295	295
<b>C</b>	Headroom with valance	cm	215	215	215	215	215
<b>D</b>	Headroom without valance	cm	237	237	237	237	237
<b>E</b>	Height of valance	cm	28	28	28	28	28
<b>F</b>	Ground clearance from pole edge	cm	175	150		130	95
<b>G</b>	Height of lower disc flange	cm	243	240		245	245
Weight without packaging	kg	34			28	32	
Support pole diameter	mm	outer ∅ 76 ( pole thickness 3 )					
Packaging: cardboard sleeve		17 kg, ∅ 33 cm, length 444 cm					



SCHATTELLO square		3.0 x 3.0 m	3.5 x 3.5 m	4.0 x 4.0 m	4.5 x 4.5 m	5.0 x 5.0 m	
Segments		8	8	8	8	8	
Area	m <sup>2</sup>	9	12.25	16	20.25	25	
<b>A</b>	Height closed incl. top plate	cm	410	418	425	433	440
<b>B</b>	Height opened incl. top plate	cm	300	308	315	323	330
<b>C</b>	Headroom with valance	cm	215	215	215	215	215
<b>D</b>	Headroom without valance	cm	237	237	237	237	237
<b>E</b>	Height of valance	cm	28	28	28	28	28
<b>F</b>	Ground clearance from pole edge	cm	180	154	119	96	62
<b>G</b>	Height of lower disc flange	cm	252	190	198	203	213
Weight without packaging	kg	25	34	43	52	58	
Support pole diameter	mm	outer ∅ 76 ( pole thickness 3 )					
Packaging: cardboard sleeve		17 kg, ∅ 33 cm, length 444 cm		18 kg, ∅ 35 cm, length 444 cm			

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

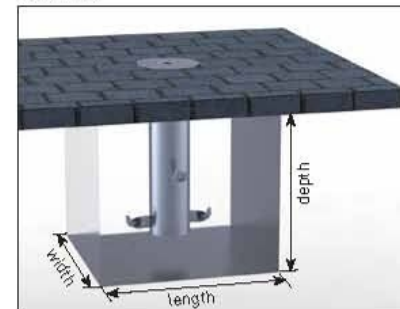

### Installation base and ballast

Size of sunshade	Installation base width/length min. depth	Required ballast for mobile installation (incl. frame)
∅ 4 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
∅ 5 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
∅ 6 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
∅ 7 m	50/50/60 cm	2 layers of concrete slabs = approx. 240 kg
3.0 x 3.0 m	60/60/60 cm	1 layer of concrete slabs = approx. 120 kg
3.5 x 3.5 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
4.0 x 4.0 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
4.5 x 4.5 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
5.0 x 5.0 m	50/50/60 cm	2 layers of concrete slabs = approx. 240 kg
2.5 x 3.5 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
2.5 x 4.0 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
2.5 x 5.0 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
3.0 x 4.0 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg
3.0 x 5.0 m	50/50/60 cm	1 layer of concrete slabs = approx. 120 kg

All measurements are to be understood as approximate. Intermediate and special sizes on request.

