


BISTRO 55 - technical data



Model FILIUS		Ø 3 m	Ø 3.5 m	Ø 4 m
Segments	Stk.	8	8	8
Area	m ²	7	9	12
A	Height closed, with valance	279	287	295
B	Height closed, without valance	259	267	295
C	Headroom with valance	200	200	200
D	Headroom without valance	202	202	222
E	Height of valance	28	28	28
F	Ground clearance with valance	113	97	79
G	Ground clearance without valance	93	77	79
H	Crank height	92	92	92
Weight without packaging	kg	12	15.5	17.5
Support pole diameter	mm	outer Ø 55 (pole thickness 2.5)		
Packaging:	cardboard sleeve, Ø 25 cm, length 307 cm, weight 7.5 kg			




1.5 x 1.5 m	2 x 2 m	2.5 x 2.5 m	3 x 3 m	3.5 x 3.5 m	2.25 x 3.05 m	3 x 4 m
4	4	8	8	8	8	8
2.25	4	6.25	9	12	7	12
259	274	280	289	295	279	290
259	254	260	269	275	259	270
200	200	200	200	200	208	208
220	202	202	202	202	210	210
23	23	28	28	28	28	28
148	120	94	63	32	80	30
148	100	74	43	12	60	10
70	92	92	92	92	92	92
15	16	18	15	16	15	16.5
outer Ø 55 (pole thickness 2.5)						
Ø 25 cm, length 307 cm, weight 7.5 kg						

The heights specified are for sunshades that are mounted in anchor tube DMZ 118. The increase in height for parasols with other installation bases can be seen in the list below:

Cross pedestal:	DMZ 110 + 6 cm
Full frame pedestal:	DMZ 111 + 9 cm
Full frame pedestal:	DMZ 112 + 12 cm
Full frame pedestal:	DMZ 114 + 16 cm
Dowel-anchored plate:	DMZ 123 + 4 cm
Granite base:	DMZ 141 + 10 cm

Minimum ballast required for mobile installation with full frame pedestal:
1 set of concrete slabs 40 x 40 x 5 cm

Installation base for all FILIUS sizes:
50 x 50 x 50 cm. Base must be frost-proof and enlarged if the ground is unstable.

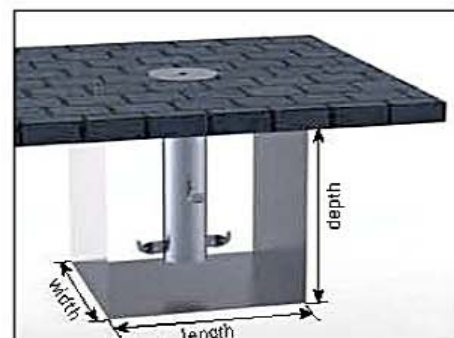

right
3D view of installation base with top plate for

Intermediate or special sizes available on request.

